




# TB-3XX Series Fixed Type Terminal Block

Voltage: 300V, Amper: 15A / 25A / 35A. Pole: 2~15 Pole

## TB-315 / TB-325 / TB-335 Series Fixed Type Terminal Blocks

### SPECIFICATIONS:

Base Material: Thermoplastic  
 Max. Working Temperature: 110°C  
 Conducting Material: Copper, Tin Plated  
 Screws: **Steel / Stainless Steel**  
 Approvals: UL / cUL approved. RoHS Compliant.  
 UL / cUL Approved File no. E257927  
 Part Numbering System: **TB-3XXYYZZU**

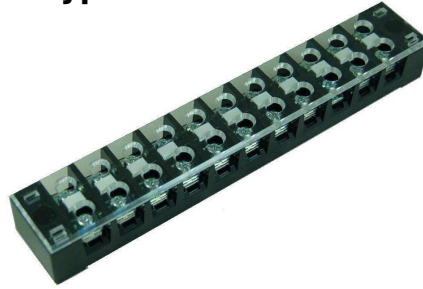

XX Current	YY Poles	ZZ type	U Stainless Screw.	Rating [A], [V]	Wire Size SOL/STR	Screw Size	Torque [in-lb]	Pitch [mm]	Gap [mm]	Width [mm]	Height [mm]	Install Hole
TB-315	02~15	C or CP	blank, U	15A, 300V	14-22 AWG CU	M3	4.4	9.5	7.4	25.0	19.0	M5
TB-325	02~15	C or CP	blank, U	25A, 300V	10-22 AWG CU	M3.5	7.1	11.1	8.8	28.0	20	M5
TB-335	02~15	C or CP	blank, U	35A, 300V	8-22 AWG CU	M4	10.6	14.3	10.3	30.0	20	M5

For ZU (Type): **C: Steel Screw** **CP: Screw with Pressure Plate** **CU: Stainless Steel Screw** **CPU: Stainless Steel Screw with Pressure Plate**



Length (L) dimensions in "mm"

No of Poles	02	03	04	05	06	07	08	09	10	11	12	13	14	15
TB-315	36.6	46.1	55.7	65.2	74.7	84.2	93.8	103.3	112.8	122.3	131.9	141.4	150.9	160.4
TB-325	40.6	51.7	62.8	73.9	85.0	96.1	107.2	118.3	129.5	140.6	151.7	162.8	173.9	185.0
TB-335	51.2	65.5	79.8	94.1	108.4	122.7	137.0	151.3	165.6	179.9	194.2	208.5	222.8	237.1



Length (L1) dimensions in "mm"

No of Poles	02	03	04	05	06	07	08	09	10	11	12	13	14	15
TB-315	26.8	36.3	45.8	55.3	64.9	74.4	83.9	93.4	103.0	112.5	122.0	131.5	141.1	150.6
TB-325	30.4	41.5	52.6	63.7	74.8	85.9	97.1	108.2	119.3	130.4	141.5	152.6	163.7	174.8
TB-335	38.9	53.2	67.5	81.8	96.1	110.4	124.7	139.0	153.3	167.6	181.9	196.2	210.5	224.8

## TB-315XX Series Terminal Blocks

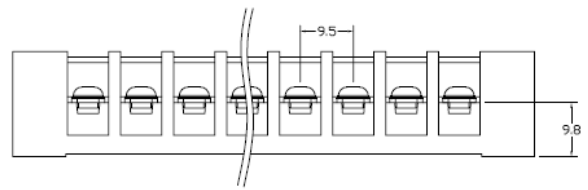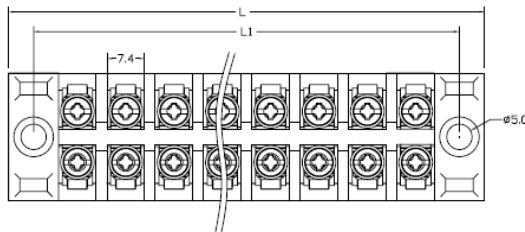

## TB-325XX Series Terminal Blocks

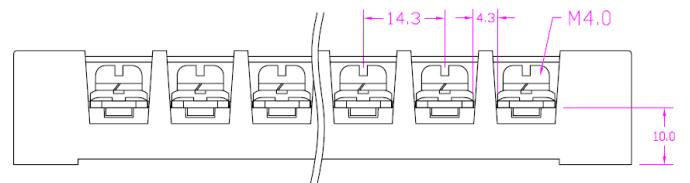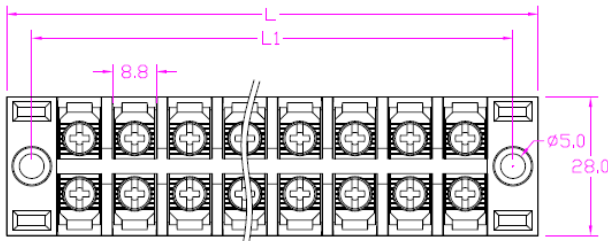

## TB-335XX Series Terminal Blocks

