




TB-3XX Series Fixed Type Terminal Block

Voltage: 300V, Amper: 15A / 25A / 35A. Pole: 2~15 Pole

TB-315 / TB-325 / TB-335 Series Fixed Type Terminal Blocks

SPECIFICATIONS:

Base Material: Thermoplastic
 Max. Working Temperature: 110°C
 Conducting Material: Copper, Tin Plated
 Screws: **Steel** / **Stainless Steel**
 Approvals: UL / cUL approved. RoHS Compliant.
 UL / cUL Approved File no. E257927
 Part Numbering System: **TB-3XXYYZZU**

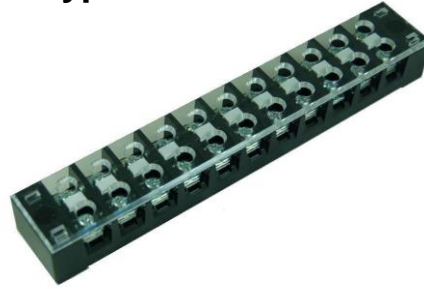

XX	YY	ZZ	U	Rating	Wire Size	Screw	Torque	Pitch	Gap	Width	Height	Install
Current	Poles	type	Stainless Screw.	[A], [V]	SOL/STR	Size	[in-lb]	[mm]	[mm]	[mm]	[mm]	Hole
TB-315	02~15	C or CP	blank, U	15A, 300V	14-22 AWG CU	M3	4.4	9.5	7.4	25.0	19.0	M5
TB-325	02~15	C or CP	blank, U	25A, 300V	10-22 AWG CU	M3.5	7.1	11.1	8.8	28.0	20	M5
TB-335	02~15	C or CP	blank, U	35A, 300V	8-22 AWG CU	M4	10.6	14.3	10.3	30.0	20	M5

For ZU (Type): **C: Steel Screw** **CP: Screw with Pressure Plate** **CU: Stainless Steel Screw** **CPU: Stainless Steel Screw with Pressure Plate**



Length (L) dimensions in "mm"

No of Poles	02	03	04	05	06	07	08	09	10	11	12	13	14	15
TB-315	36.6	46.1	55.7	65.2	74.7	84.2	93.8	103.3	112.8	122.3	131.9	141.4	150.9	160.4
TB-325	40.6	51.7	62.8	73.9	85.0	96.1	107.2	118.3	129.5	140.6	151.7	162.8	173.9	185.0
TB-335	51.2	65.5	79.8	94.1	108.4	122.7	137.0	151.3	165.6	179.9	194.2	208.5	222.8	237.1



Length (L1) dimensions in "mm"

No of Poles	02	03	04	05	06	07	08	09	10	11	12	13	14	15
TB-315	26.8	36.3	45.8	55.3	64.9	74.4	83.9	93.4	103.0	112.5	122.0	131.5	141.1	150.6
TB-325	30.4	41.5	52.6	63.7	74.8	85.9	97.1	108.2	119.3	130.4	141.5	152.6	163.7	174.8
TB-335	38.9	53.2	67.5	81.8	96.1	110.4	124.7	139.0	153.3	167.6	181.9	196.2	210.5	224.8

TB-315XX Series Terminal Blocks

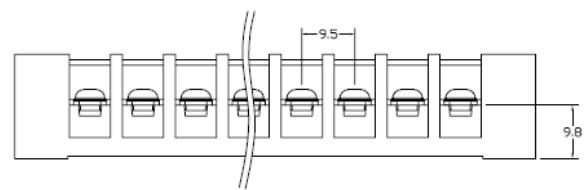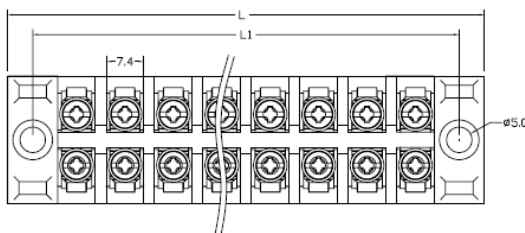

TB-325XX Series Terminal Blocks

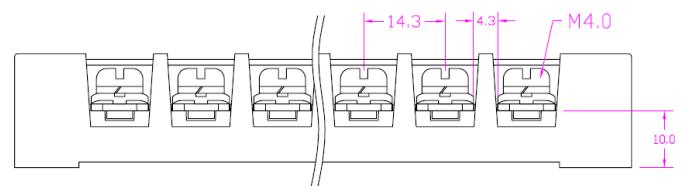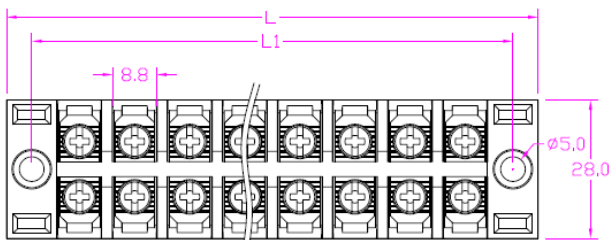

TB-335XX Series Terminal Blocks

